


Strip Till



ISO9001:2015 certified

Our Tradition is Quality Driven and Field Proven

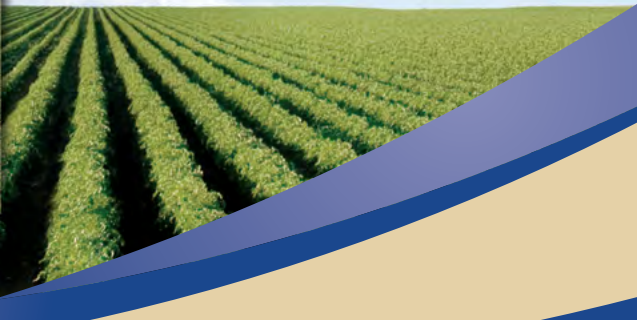

Strip Till

The Ultimate in Strip Till Versatility and Performance

Rugged, Dependable and Easy to Use

Available in 6 and 8 Row Pull Package or 6, 8 and 12 row 3 point

Roller Options



Straight Blade Roller

Spring usage, best if used just prior to planting. Reduces clods and produces a firm seedbed.



Contoured Blade Roller

Spring and Fall usage, general purpose. Produces a raised strip, reduces drying and warming times in the Spring.

Closing Disk Options



Notched Concave



Straight Blade with 7 Degree Camber



Straight 12 Wave

Remlinger's PST has everything you need and want in a strip-till

The "Original" Remlinger Precision Strip Till (PST) row unit was farmer inspired and tested. The new "Strip Builder" PST still has the same great features as the original. However; with feedback and input from our many satisfied customers; we have improved upon the original for years of hassle free operation.

The PST creates residue free, planting strips. As the strips are created, apply NH₃, dry fertilizer, liquid fertilizer or any combination in one pass. These strips provide better soil aeration and quicker spring warm up. Quicker spring warm up allows earlier planting, faster emergence and better stands. Add up all of these features and you can see how the Remlinger PST can lead to higher yields.

- 5 inch, 6-1/2 inch and 8 inch depth settings
- Floating trash wheels
- Heavy duty coulter
- Heat treated deep ripper point
- 18 inch adjustable notched or 18 inch, 12 wave closing disk
- Parallel links on each row to provide a more uniform depth control
- Optional "true" spring reset shank design - no need to lift the row off the ground to reset
- Optional NH₃, dry fertilizer tube, liquid fertilizer tube or any combination
- Provides better soil aeration
- Quicker spring warm up allows earlier planting
- Faster crop emergence and better, fuller stands
- All of these benefits lead to better yields



ISO9001:2015 certified

Remlinger Manufacturing Co., Inc.
16394 U.S. 224 • P.O. Box 299
Kalida, OH 45853
1.800.537.7370 • 419.532.3647
Fax: 1.419.532.2244

www.remlingerfmfg.com

Remlinger Manufacturing reserves the right to change pricing or specifications at anytime without notice or obligation.